

# In-Wall Relay



The In-Wall On/Off Module is designed to control the on/off status of lighting and appliances load in your house.

Compact in design, yet certified for safety by makes it suitable for installation in crammed electrical box located behind wall switches. Supporting Z-Wave Plus technology, it is fully compatible with other Z-Wave Plus controllers to create a smart home environment.

## Main Features

- Remote On/Off control of the load connected wirelessly
- Support up to 2500W resistive load
- Can be controlled by U-Net gateway or sensor device
- Z-Wave Plus wireless technology SDK 6.5x
- LED indicator and button for pairing
- 3 wire connection only
- Hardware overload protection
- Compact size, fits in wall box of major European countries



# Brief Product Specifications

RF Protocol: U-Net 3.0

Operating Frequency: 868 MHz

Range: Up to 200m (Free Space)


Power Input: 220-240V/50Hz

Working Temperature: -10°C~40°C

Maximum Power Load:

- Resistive load Max. 11A
- Incandescent load Max. 1200W
- Fluorescent load Max. 320W

## Dimension

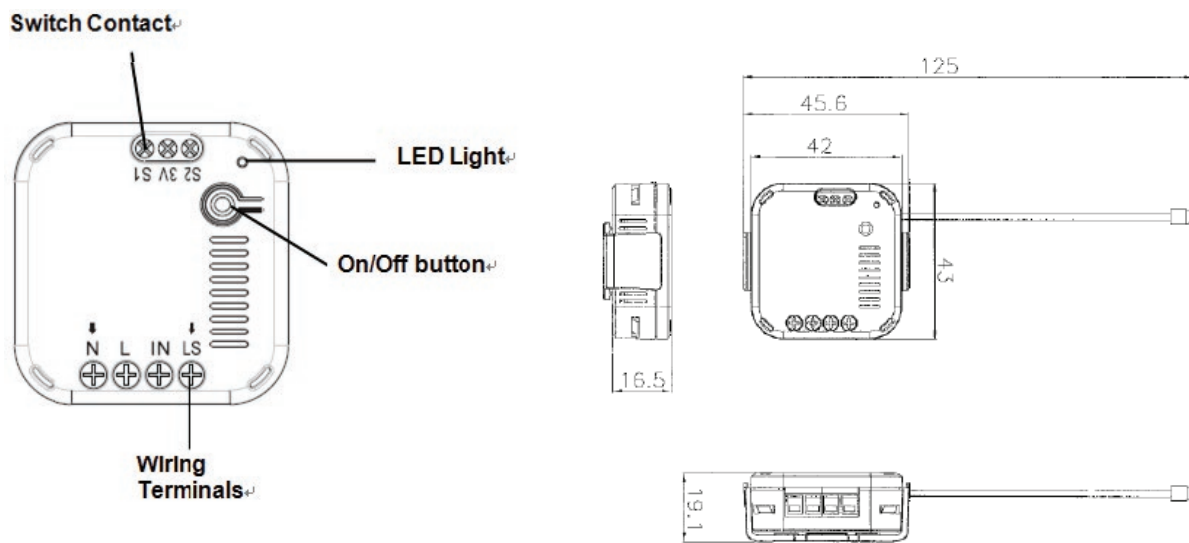

Material: PC

Dimension:

- 45.6L x 43W x 19.1D(w/ Bracket)

- 42L x 43W x 16.5D (w/o Bracket)

